
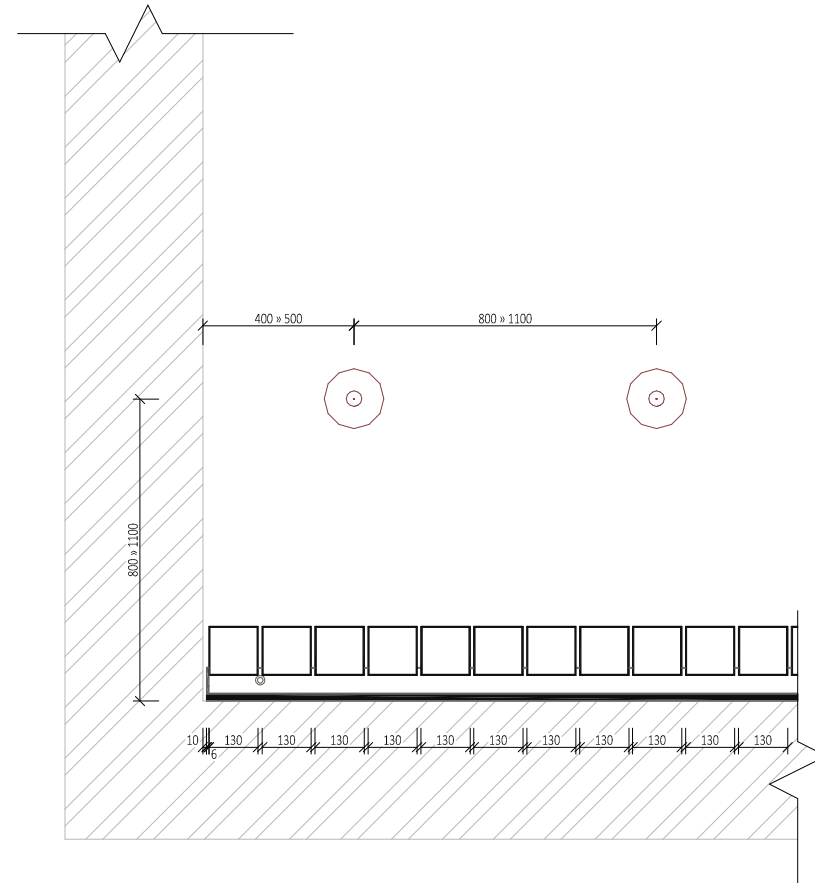


05_VERTICAL CASCADE GARDEN SPECIFICATION – LIGHTS, INTERNAL CORNER

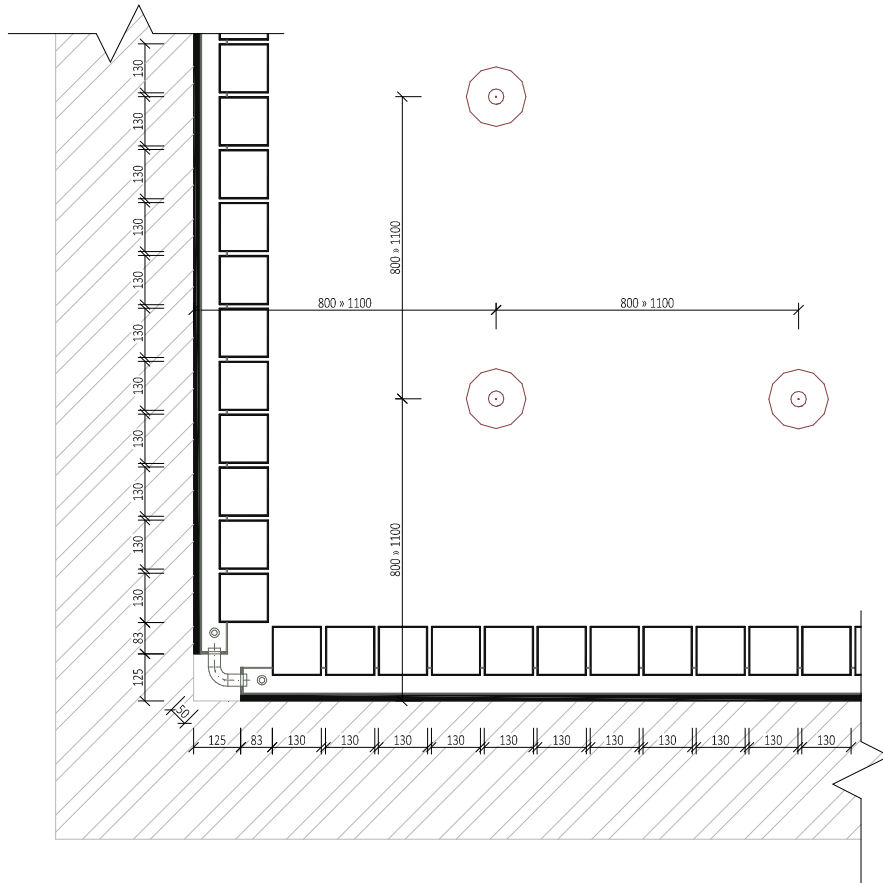

VERTICAL CASCADE GARDEN SHOULD BE INSTALLED ONTO 18MM OSB BOARDS.
OSB BOARDS SHOULD BE ATTACHED TO THE SUBSTRATE WALL DIRECTLY OR USING A UA ALU PROFILE (BEARING LOAD OF AT LEAST 60KG/M²).
TROUGHES ARE ATTACHED ONTO THE OSB BOARDS USING TX20 SCREWS 500MM APART AND 100MM FROM THE EDGE.
VISIBLE SIDE AND BOTTOM EDGE DETAIL IS MADE FROM 18MM MDF / SDK 15MM (INTERNAL ONLY).

LIGHTING SPECIFICATION:
LIGHT INTENSITY MIN.600 lx
LIGHT TEMPERATURE (COLOUR) MIN. 4000 K